



The PalletPro™ 57F Coil Nailer is built for high speed operation, this coil nailer is designed to handle the toughest production applications.

## Applications:

A lightweight and versatile tool for boxes and crates, carton-to-skid and pallets.

## Features and Benefits:

- Collation – wire weld
- Aluminum mainbody – tool weighs only 5.9 lbs.
- Adjustable nail canister accommodates wide range of nails
- High capacity nylon magazine – fast and easy loading
- Body protection – side steel wearplates reduce abrasion of tool
- High durability driver and piston bumper for long life


For additional information on how Senco will save you time, reduce costs, and increase quality, call us at 1-800-543-4596 to find your nearest Authorized Senco Dealer or Distributor or visit our web site at: [www.senco.com](http://www.senco.com)

## Tool Specifications:

Item #: 4L0001N Contact Actuation (Dual Action)  
 Weight: 5.9 lbs. ( 2.67 kg)  
 Height: 11.14" (283 mm)  
 Length: 11.97" (304 mm)  
 Nail Capacity: 300 - 350  
 Operating Pressure: 70-120 psig (4.8-8.3 bar)  
 Mode of Operation: Tool is available with either sequential or contact actuation trigger mechanism.  
 Hose Fitting: 3/8" NPT

## Fastener Specifications:

Drives full round head coil nails from 1" - 2 1/4" smooth and ring shank, .082 - .092 diameter.

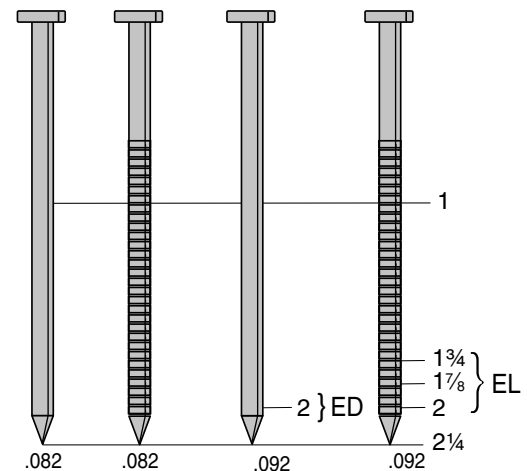

**Sequential Actuation Trigger** (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

**Contact Actuation Trigger** (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions or log on to [www.senco.com](http://www.senco.com) or call 1-800-543-4596 for more information on Senco's trigger systems. Choose the right trigger system for your specific needs!